




Bulldog QD Wheel Clamps.

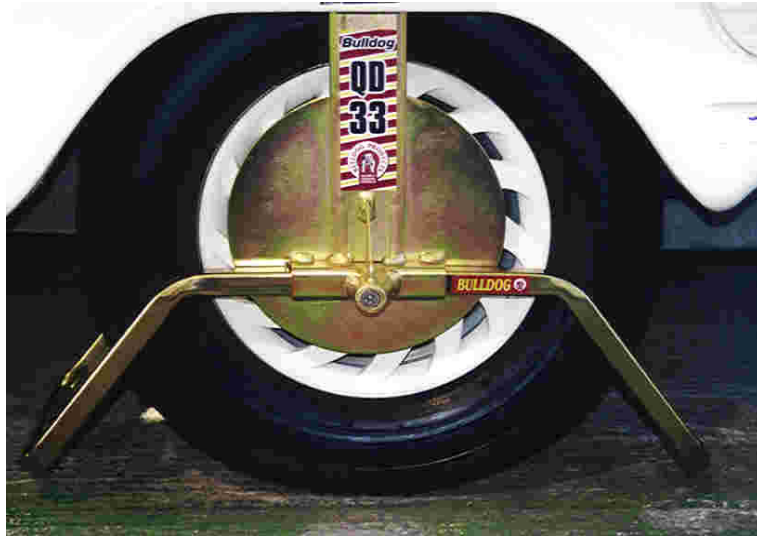

Features:-

1. Top arm constructed from 75 x 6mm rolled edge steel.
2. Lower arms constructed from 25 x 25 x 3mm case hardened steel.
3. Comes complete with Bulldog's Plunge Lock which can be locked without the use of the key.
4. 10 pin drill and pick resistant lock with over one million possible key combinations, as used in Bulldog's TNO/TUV approved products.
5. 11" (270mm) diameter wheel nut protection disc, 3mm thick.
6. **Model QD12** fits trailer tyres: 12" diameter no wheel trim (As used on Ifor Williams Trailers)
tyres: 185/60 R12 & 195/50 R13
Model QD13 fits trailer tyres: 13" diameter including trim (As used on Equitrek Trailers)
tyres: 195/50 R13
Model QD22 fits caravan tyres: 13" diameter no wheel trim
tyres: 165 R13
Model QD22Y fits trailer tyres: 13" diameter no wheel trim
tyres: 155 R13
Model QD33 fits caravan tyres: 13" diameter including flat trim.
tyres: 145 R13, 155 R13, 165 R13, 175 R13.
Model QD44 fits caravan tyres: 14" & 15" diameter including flat trim.
tyres 165 R14, 175 R14, 185 R14, 195/70 R14.
195/70 R15 & 205/65 R15
7. Weight: QD12 = 10.6kg, QD13 = 10.6kg, QD22/QD22Y = 10.1kg, QD33 = 11.1kg, and QD44 = 10.9kg.
8. All QD wheelclamps have Sold Secure approval.

BULLDOG SECURITY PRODUCTS LIMITED

Units 1-4 Stretton Road, Much Wenlock, Shropshire, TF13 6DH.

Tel: 01952 728171 Fax: 01952 728117

Email: sales@bulldogsecure.com Web Site: www.bulldogsecure.com